




TELESCOPIC MAST

Powered by the Rigid Chain

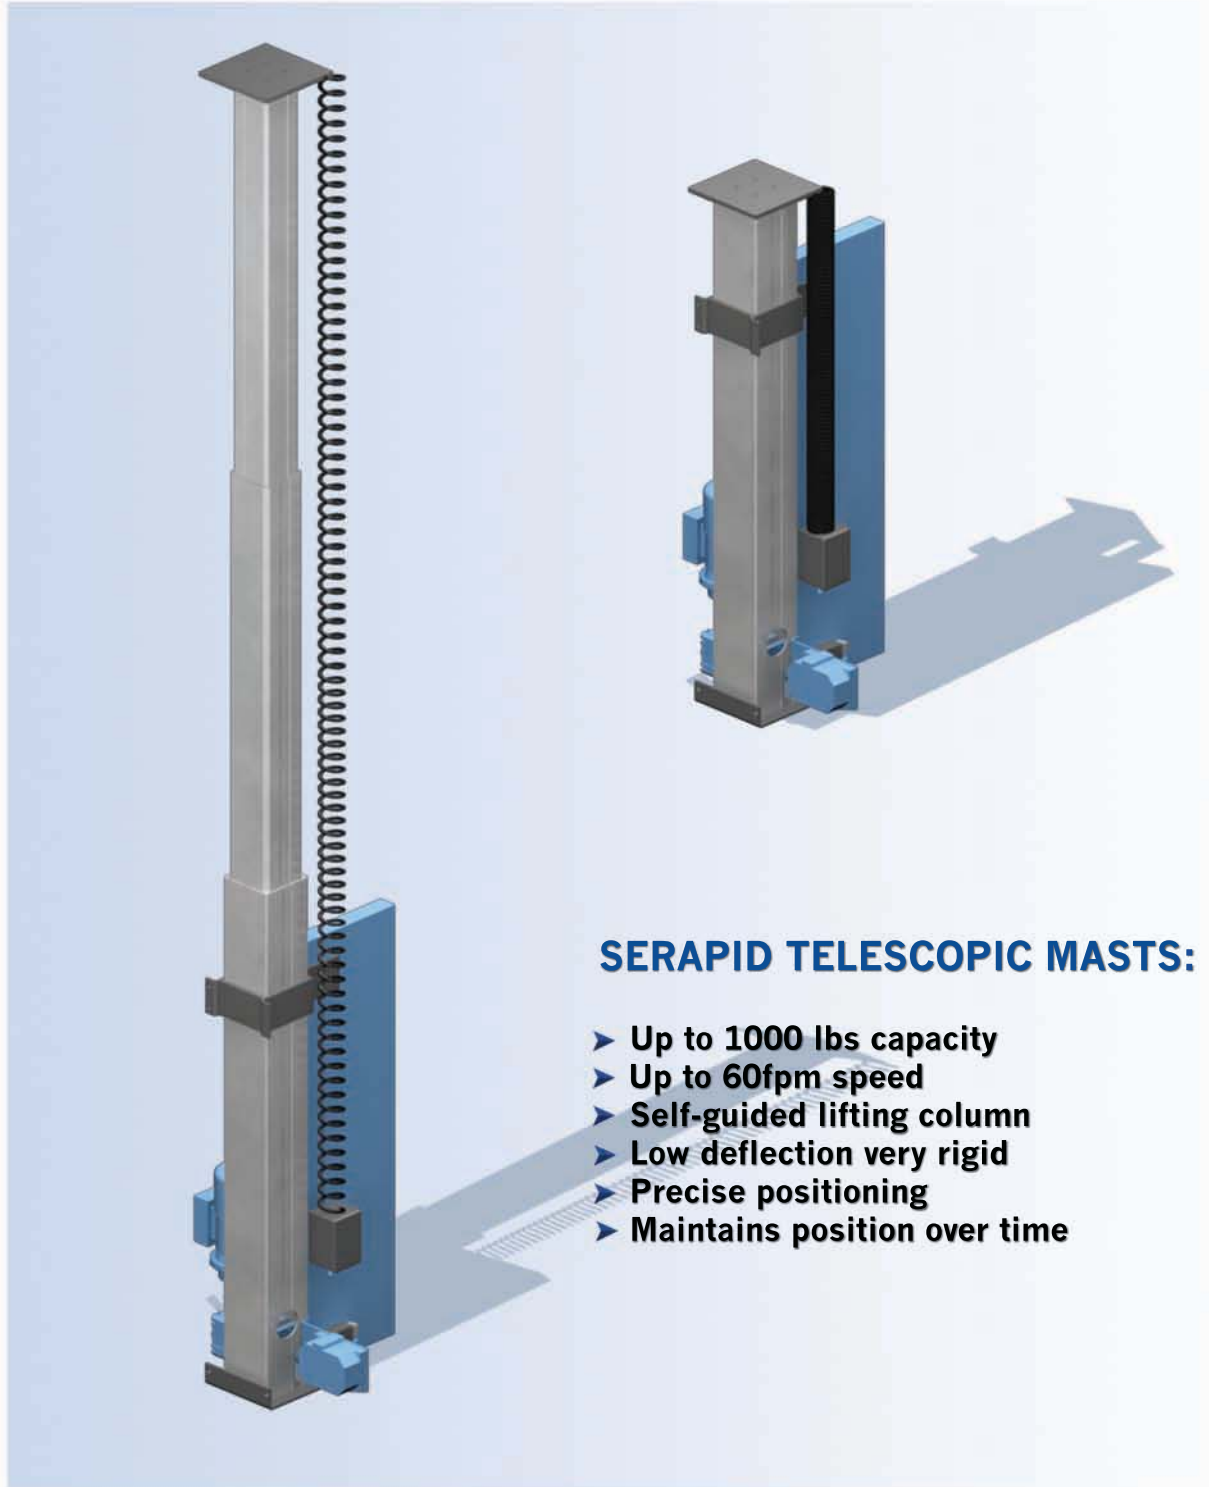

SERAPID TELESCOPIC MASTS:

- Up to 1000 lbs capacity
- Up to 60fpm speed
- Self-guided lifting column
- Low deflection very rigid
- Precise positioning
- Maintains position over time



Standard Masts Include:

- Top Mounting Plate
- Motor with Fail Safe Brake
- Side Mounting Brackets
- 40 SPSG Rigid Chain Actuator
- 120V Operating Voltage
- Payload Power Cable
- 2-Positions
- Stationary

Standard Masts	Extended Height	Retracted Height	Standard Payload*	Standard Speed	Increased Payload/Speed Options		
					Maximum Payload*	Intermediate Deployment Speed	Maximum Deployment Speed
TM 20	20 ft/ 6 m	60 in/ 1.5 m	200 lbs/ 91 kg	10fpm/ 3m/min	1000 lbs/ 454 kg	30 fpm /150 mm/s	60 fpm /300 mm/s
TM 30	30 ft/ 9 m	80 in/ 2 m	200 lbs/ 91 kg	10fpm/ 3m/min	600 lbs/ 272 kg	30 fpm /150 mm/s	60 fpm /300 mm/s
TM 40	40 ft/ 12 m	118 in/ 3 m	200 lbs/ 91 kg	10fpm/ 3m/min	400 lbs/ 182kg	30 fpm /150 mm/s	60 fpm /300 mm/s

Specifications above are for standard masts; Please contact us for customization options; Controls not included with standard masts



北京泰瑞恩商贸有限公司
Beijing Torion Trading Co.,Ltd.

Tel:13801253818 Fax:010-84067150
www.torion.cn sales@torion.cn

